

Task 38

Greenhouse Gas Balances of Biomass and Bioenergy Systems

Snjezana Fijan-Parlov
(Project Leader)

Marko Liposcak

EKONERG
Institute, Ltd.

Greenhouse Gas Benefits of Biodiesel Use in Croatia in the Context of Joint Implementation

Abstract

This study evaluates the greenhouse gas (GHG) reduction potential of biodiesel use in Croatia through the context of Joint Implementation (JI). The Republic of Croatia is a signatory to the Kyoto Protocol. Upon its entering into force and its ratification by Parliament, Croatia shall commit to reduce its emissions of GHG by 5 percent in relation to the reference year, over the commitment period from 2008 to 2012. In total 39 measures have been identified to meet the reductions in all sectors. Biomass is seen as a source with great potential in reducing GHG among renewable energy sources. One of the most promising options with respect to liquid biofuels is the production and use of biodiesel in the transportation sector which could play a significant role in reducing GHG emissions. A life-

cycle analysis (LCA) of passenger cars and urban (city) buses was conducted to compare the overall GHG emissions of biodiesel and fossil fuel systems for transportation. The mitigation costs for GHG emissions reduction are also analysed and given in € per avoided tonne of CO₂ equivalent (CO₂e). The results demonstrate a significant reduction of GHG emissions by replacing fossil fuels with biodiesel in the transportation sector, with mitigation costs ranging from 243 to 327 € per avoided tonne of CO₂e. GHG emissions reduction per unit in energy in biodiesel is about 47.7 g CO₂e/MJ. This study may help policy makers, utilities and industry to decide on the most cost effective GHG mitigation options, and increase implementation of similar projects, those providing Croatia with strategies for meeting its emission reduction targets.



Rapeseed field, Courtesy of EHP, Croatia



Public Transport in Zagreb, Courtesy of EHP, Croatia

Scope

and objectives of the study

The main aims of the project are:

- to analyse the LCA GHG emissions of biodiesel for wider use of biodiesel in the transportation sector in Croatia,
- to assess the emission avoidance compared to a baseline scenario without enhanced introduction of biodiesel,
- to assess the benefits related to energy balance of biodiesel,
- to analyse the possibilities of producing biodiesel in the framework of JI including costs of GHG mitigation through biodiesel use.

Methodology and data

For this study the standard methodology developed by IEA Bioenergy Task 38 for GHG balances of bioenergy systems in comparison with fossil energy systems was used.

According to the National Biodiesel project **rapeseed** (*Brassica napus* L. ssp. *oleifera*) is the preferred crop for biodiesel production in Croatia, because of very favourable climate conditions.

The scenario approach was used for the purposes of assessing the future annual production/consumption of biodiesel in Croatia. Three scenarios were defined each of them predicting the annual biodiesel production/consumption. "Baseline" scenario and "Additional Measures" scenarios are based on the National Energy Sector Development Strategy. "Maximum potential" scenario is based on

the projections of the biodiesel project within the framework of National Energy Programme (BIOEN).

■ **"Baseline" Scenario** –

"Baseline" is the most probable scenario, assuming the moderate introduction of new technologies and relatively slow introduction of reforms and restructuring in energy sector. Data for the purposes of this study refers to biodiesel energy demand projections in year 2005, 2010 and 2020.

■ **"Additional measures" scenario** – This scenario option assumes significant change in the overall orientation of the Croatian industry and economy as a result of the climate change and introduction of sustainable development concepts. This scenario also assumes implementation of additional measures for GHG emissions reduction the more formal

recognition that biofuels, particularly biodiesel, are one of the most important measures in the transport sector.

■ **"Maximum potential" scenario** – According to the biodiesel project within the framework of National Energy Program (BIOEN), maximum land use for cultivation of oil rape in Croatia is roughly 400 000 ha. This was the starting point in determining the oil rape cultivation needs for biodiesel production, with peak potential in 2020.

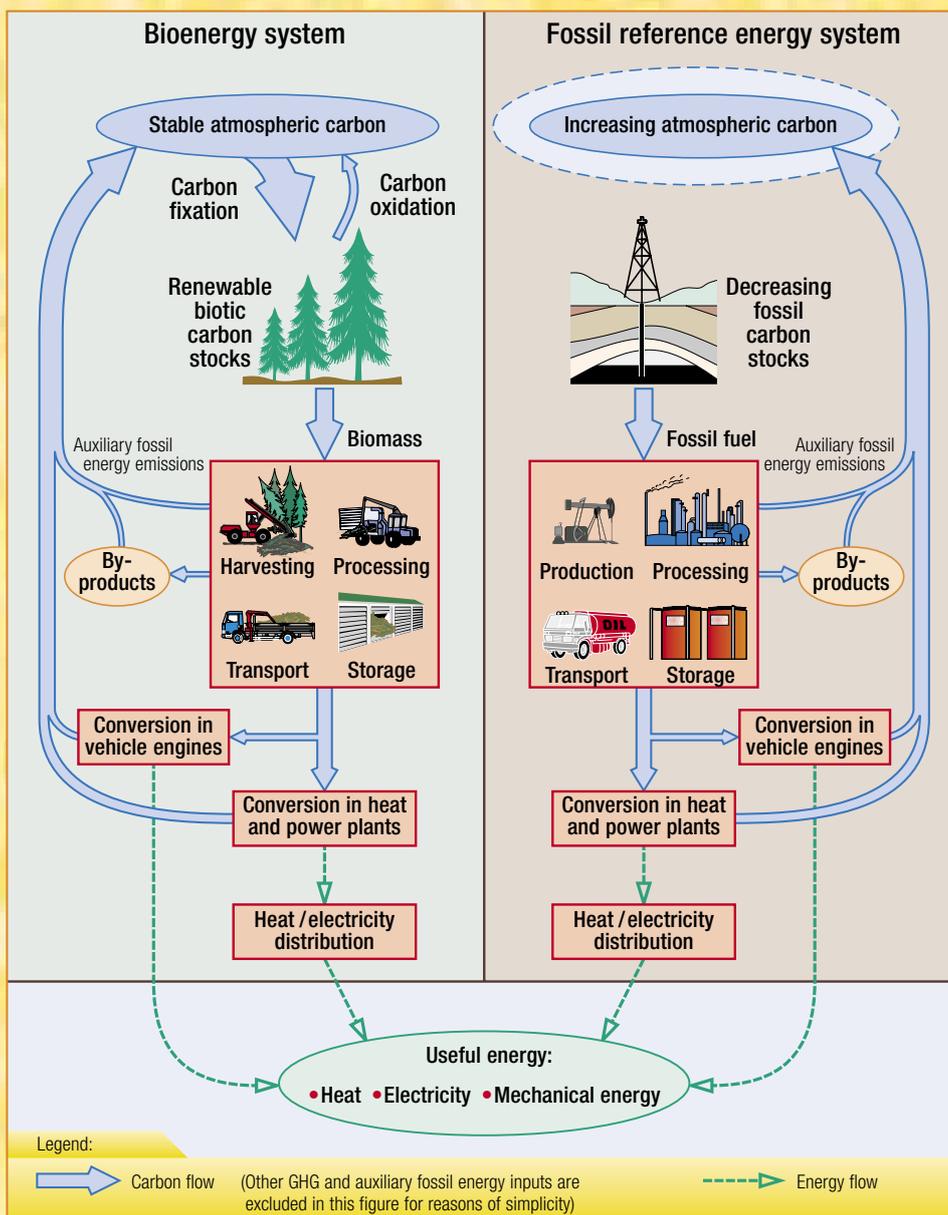


Figure 1: General standard methodology for calculation of GHG balance

Figure 2, presents the comparison between production/consumption of biodiesel according to the "Baseline", "Additional measures" and "Maximum potential" scenario.

Biodiesel is used as a motor fuel in vehicles and machines with internal combustion engines which normally use a fossil based diesel. For the purposes of this study, biodiesel will be used by

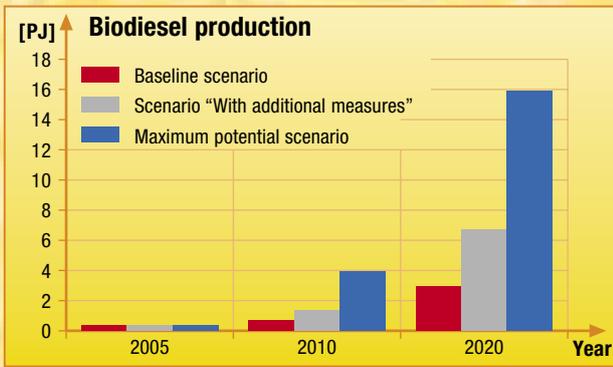


Figure 2: Production of biodiesel expressed in energy units



Biodiesel fuel pump in Mureck, courtesy of EIHP, Cratia

buses in public transport and passenger cars with internal combustion engines.

According to the IPCC, when calculating the GHG emissions in the transport sector, emissions from the systems using biomass equal zero. More specifically, carbon absorbed from the atmosphere during photosynthesis equals the amount of CO₂ emitted during the energy conversion in the vehicles. However, the LCA of biodiesel is not completely free of GHG emissions. Cultivation of rape, transport and biodiesel production require additional energy from fossil fuels that must be included in the overall emissions balance within the LCA. Furthermore, during the biodiesel production process some by-products are created, such as rape cake in the process of pressing and glycerine in the process of esterification. The GHG emissions reduction strongly depends on how these by-products are used and substituted.

The GHG emissions balance assessment was done by using the **GEMIS** model (**G**lobal **E**mission **M**odel of **I**ntegrated **S**ystems) developed in Öko-Institut in Darmstadt, Germany. Due to insufficient Croatian national data, the majority of data required by the model was taken from the extensive Austrian GEMIS database of different

process chains for biodiesel systems occurring in industry, agriculture, transport, power generation, etc. (dataset: "GEMIS-Transportation systems" from JOANNEUM RESEARCH 2003).

Two different national scales were assumed: one to compare the reference fossil to bioenergy/biodiesel system use in buses, and one to compare reference fossil to bioenergy/biodiesel system use in cars with internal combustion engines.

There were three options in the case considering biodiesel use in buses/passenger cars:

- Bus/Passenger car diesel
- Bus/Passenger car biodiesel, energy use of by-products
- Bus/Passenger car biodiesel, material use of by-products

The lifecycle of biodiesel for the purposes of the analysis included:

- Set a side land
- Cultivation of oil rape
- Transport, drying and storage
- Pressing
- Transestering (production of biodiesel)
- Use of by-products with the substitutions of conventional products by the by-products
- Transport of biodiesel to the filling station and filling the biodiesel into the vehicles
- Combustion of biodiesel in vehicles.

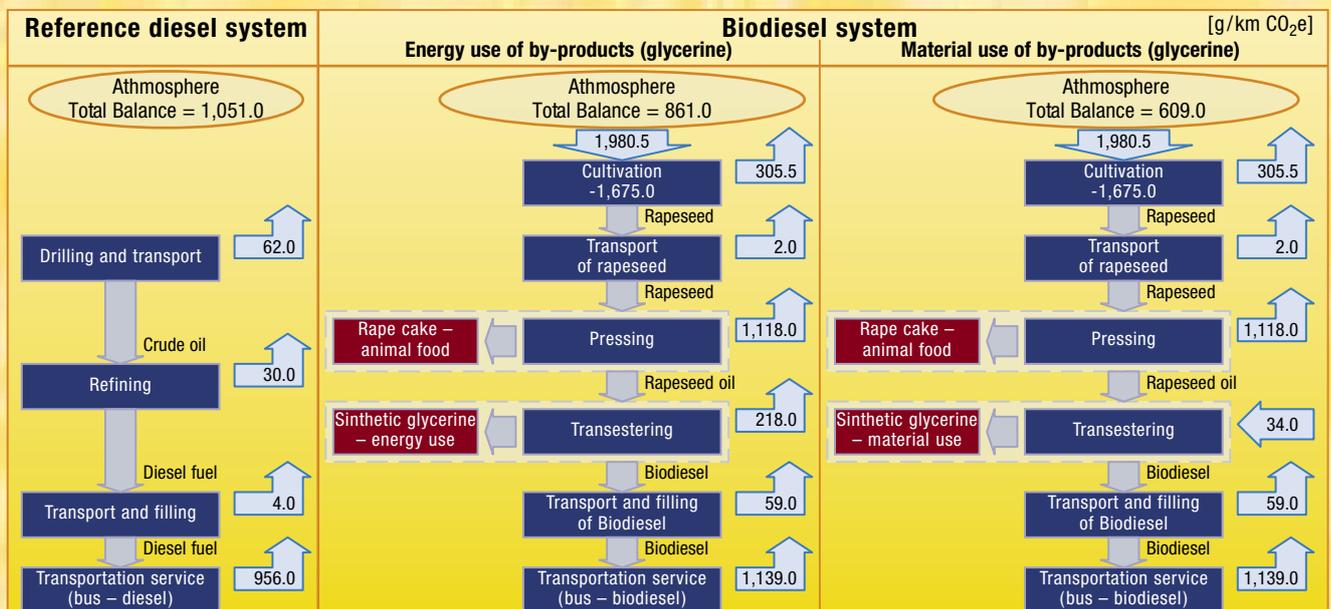


Figure 3: Diesel and biodiesel system flowcharts in terms of GHG emissions for the biodiesel use in buses

Results

GHG emissions balance for bioenergy and fossil reference systems

The results of the calculation within the GEMIS model are expressed in grams of CO₂e per 1 km driven. Figure 3, presents the LCA GHG emissions of the diesel and biodiesel systems in CO₂e in public transport buses in Croatia.

The comparison of GHG emissions from buses and cars with internal combustion engines using biodiesel or fossil fuels is shown in Figure 4, per 1 km driven. The share of CO₂, CH₄, and N₂O on the total CO₂e emissions is also shown.

The results demonstrate that GHG emissions reduction per unit energy in biodiesel is about 47.7 g CO₂e/MJ. The comparison of GHG emissions illustrates that the LCA GHG emissions of the biodiesel system are lower and even much lower than the fossil fuel reference system, regardless of the type of vehicle and use of biodiesel production by-products.

Overall GHG emissions avoided for the defined scenarios

The LCA performed using the GEMIS model provided the detailed data of specific GHG emissions per 1 km driven on either biodiesel or diesel fuel. Based on this overall GHG emissions avoidance data, a national perspective is considered.

Since the GHG emissions are highest in the “Baseline” scenario, the emission reduction potential in case of other two scenarios was obtained by subtraction of GHG emissions in respective scenario from the GHG emissions in “Baseline”. Emission reduction potential for the “Additional measures” and “Maximum potential scenario” is given in Table 1.

Possibilities of producing biodiesel in the framework of JI

The JI mechanism provides the possibility of a more cost-effective and flexible way to comply with the Kyoto protocol. JI projects result

in emission reduction units (ERUs) which can then be used by investing Annex I parties to help meet their emission targets. The Republic of Croatia, as a party included in Annex I to the protocol, has the possibility to participate in the GHG emissions reduction projects within the framework of the JI mechanism.

On the basis of the calculated annual emission reduction potential given in Table 1, the emission reduction potential for Kyoto commitment period (2008–2012) was calculated (Table 2).

From these results it can be concluded that there is a potential for implementation of GHG emissions reduction through biodiesel projects in Croatia by the JI mechanism.

Costs of GHG mitigation through biodiesel use

The GHG mitigation costs were analysed based on the economic comparison of the total transportation costs in the case of biodiesel and diesel use respectively. According to a feasibility study introducing the biodiesel fuel production in Republic of Croatia, the production cost of biodiesel from rapeseed without subsidies from Government would be between 0.0263 and 0.0306 €/MJ. The production costs of diesel fuel including taxes is about 0.0194 €/MJ.

Table 1: Annual emission reduction potential CO₂e [kt]

| Annual emission reduction potential in CO ₂ e [kt] | | | |
|---|------|--------|--------|
| Year | 2005 | 2010 | 2020 |
| Scenario “With additional measures” | 0.00 | 38.63 | 183.12 |
| Maximal potential scenario | 2.46 | 158.57 | 624.25 |

Table 2: Emission reduction potential for Kyoto commitment period in CO₂e [kt]

| Emission reduction potential for Kyoto commitment period in CO ₂ e [kt] | | | | | | |
|--|-------|--------|--------|--------|--------|--------|
| Year | 2008 | 2009 | 2010 | 2011 | 2012 | Total |
| Scenario “With additional measures” | 13.91 | 24.37 | 38.57 | 47.22 | 57.00 | 181.08 |
| Maximal potential scenario | 67.95 | 107.69 | 158.52 | 188.50 | 221.73 | 744.38 |

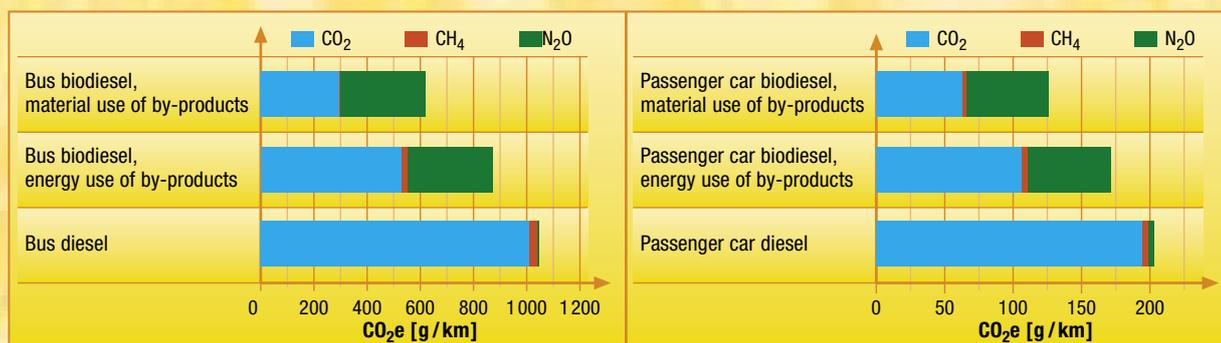


Figure 4: Comparison of GHG emissions of cars with internal combustion engine driven with biodiesel and diesel

Because of high uncertainty regarding production costs of biodiesel in Croatia, two options were taken into consideration:

- **Option I** –
production cost of biodiesel = 0.0263 €/MJ
- **Option II** –
production cost of biodiesel = 0.0285 €/MJ

The combination of GHG emissions and transportation cost contributed to mitigation costs for GHG reduction, of € per avoided tonne of CO₂e. These mitigation costs of replacing diesel by biodiesel are shown in Table 3.

Table 3: Mitigation costs for GHG reduction with biodiesel in the transportation sector

| €/t CO ₂ equivalent avoided | |
|--|--------|
| Substituted fossil system | Diesel |
| Biodiesel/rapeseed – option I | 243 |
| Biodiesel/rapeseed – option II | 327 |

Conclusions

This study provides information on the LCA GHG emissions, national emission reduction potential and GHG emissions mitigation costs in using biodiesel as a substitution fuel in Croatia. The results of the study demonstrate that using biodiesel in the Croatian transportation sector results in much lower GHG emissions than when using fossil fuels. In that sense, enhanced use of biodiesel in the transportation sector could be a valuable contribution to meet Croatia's GHG emissions reduction commitments under the Kyoto protocol. The mitigation costs of replacing diesel by biodiesel are in the range 243–327 € per avoided tonne of CO₂e. These results demonstrate that GHG emissions reduction per unit energy in biodiesel is about 47.7 g CO₂e/MJ. Nevertheless, the results of the study illustrate that there is a potential for achieving GHG emissions reduction through biodiesel projects through the JI mechanism. The primary barrier implementing this type of JI project in Croatia is that Croatia has not resolved its baseyear inventory data yet.

The results of this study should help policy makers evaluate the GHG emissions reduction potential of biodiesel projects in Croatia and the compilation of reduction scenarios in connection with the Kyoto Protocol. For more detailed information please see the full report (www.joanneum.at/iea-bioenergy-task38/projects/task38casestudies/cro-fullreport.pdf)

References

- The First National Communication of the Republic of Croatia to the United Nations Framework Convention on Climate Change (UNFCCC), Project Leader: Vladimir Jelavić, Ministry of Environmental Protection and Physical Planning, Zagreb, 2001.
- D. Vešligaj, Ž. Jurić, J. Burek, A. Hublin, S. Fijan-Parlov, Republic of Croatia Projections of Greenhouse Emissions, EKONERG, Zagreb, 2003.
- Energy Institute "Hrvoje Požar", BIOEN – Biomass and waste utilisation programme (in Croatian), Zagreb, 2001
- Faculty of Agriculture, University of Zagreb, PROJECT BIODIESEL – Introducing the biodiesel fuel production in Republic of Croatia, a feasibility study (in Croatian), Zagreb, 2001
- B. Schlamandiger, M. Apps, F. Bohlin, L. Gustavsson, G. Jungmeier, G. Marland, K. Pingoud and I. Savolainen: Towards a standard methodology for greenhouse gas balances of bioenergy systems in comparison with fossil energy systems, Biomass and Bioenergy Vol. 13, No. 6 pp. 359–375, 1997.
- Government of Republic of Croatia: Croatia In 21st Century, Energy Sector Development Strategy (in Croatian), Zagreb, 2002.
<http://www.hrvatska21.hr/energetika.pdf>
- M. A. Elsayed, R. Matthews, N. D. Mortimer, Carbon and energy balances for a range of biofuels options, Resources Research Unit, Sheffield Hallam University, 2003.
- Houghton et. al., The Science of Climate Change, Contribution to WGI to the Second Assessment Report of the Intergovernmental Panel on Climate Change, Cambridge University press, 1995.
- GEMIS – A, 1998: Global Emission Model of Integrated Systems – Austria, Austrian Environmental Agency Vienna 1998
- G. Jungmeier, S. Hausberger, L. Canella: Greenhouse gas emissions and cost of transportation services with biofuels compared to fossil fuels, the report also provides the data set "GEMIS Transportation systems", (report published in German), JOANNEUM RESEARCH, Graz 2003
- V. Delija-Ružić, D. Vešligaj, A. Hublin, S. Fijan-Parlov, Ž. Jurić, V. Jelavić, V. Grgasović, Policy Background Paper for Kyoto Mechanisms Implementation With Emphasis on Joint Implementation (JI), EKONERG, Zagreb, 2003

Acknowledgement

Significant contributions were made by Gerfried Jungmeier and Lorenza Canella of JOANNEUM RESEARCH and the Task 38 National Team Leaders. The study was funded by IEA Bioenergy Task 38 participation fees and through the BIOMITRE project funded by the EC, DG Tren, contract NNE5-69-2002.

IEA Bioenergy (www.ieabioenergy.com) is an international collaborative agreement, set up in 1978 by the International Energy Agency (IEA) to improve international cooperation and information exchange between national bioenergy research, development and demonstration (RD & D) programs. IEA Bioenergy aims to realize the use of environmentally sound and cost-competitive bioenergy on a sustainable basis, thereby providing a substantial contribution to meeting future energy demands.

Task Coordination

Bernhard Schlamadinger

Joanneum Research
Elisabethstrasse 5, A-8010 Graz, AUSTRIA
Phone: +43 316 876-1340 • Fax: +43 316 8769-1340
e-mail: bernhard.schlamadinger@joanneum.at

National Team Leaders



AUSTRALIA

Annette Cowie

State Forests New South Wales
P. O. Box 100 Beecroft, New South Wales 2119
Australia
Phone: +61 2 9872-0138 • Fax: +61 2 9871-6941
e-mail: annettec@sf.nsw.gov.au



AUSTRIA

Susanne Woess-Gallasch

Joanneum Research
Elisabethstrasse 5, A-8010 Graz, Austria
Phone: +43 316 876-1330 • Fax: +43 316 8769-1330
e-mail: susanne.woess@joanneum.at



CANADA

Terry Hatton

Canadian Forest Service, Natural Resources Canada
580 Booth St., Ottawa, Ontario
K1A 0E4 Canada
Phone: +1 613 947-9077 • Fax: +1 613 947-9020
e-mail: thatton@ncran.gc.ca



CROATIA

Snjezana Fijan-Parlov

EKONERG
Koranska 5, PP 144, HR-10000 Zagreb, Croatia
Phone: +385 1 6000-122 • Fax: +385 1 6171-560
e-mail: sfijan@ekonerg.hr



DENMARK

Niels Heding

Danish Forest and Landscape Research Institute
Hoersholm Kongevej 11
DK 2970 Hoersholm, Denmark
Phone: +45 45 763-200 • Fax: +45 45 763-233
e-mail: NIHE@kvl.dk



FINLAND

Sampo Soimakallio

VTT-Processes
P.O. Box 1606, FIN-02044 VTT (Espoo)
Phone: +358 9 456-6767 • Fax: +358 9 456-7026
e-mail: sampo.soiimakallio@vtt.fi

Kim Pingoud

Finnish Forest Research Institute
Unioninkatu 40 A, FIN-00170 HELSINKI
Phone: +358 10 211 2063, Fax: +358 10 211 2104
e-mail: kim.pingoud@metla.fi



IRELAND

Kenneth Byrne

Centre for Hydrology, Micrometeorology & Climate Change, Department of Civil and Environmental Engineering, University College Cork
Phone: +353 21 490-3025 Fax: +353 21 427-6648
e-mail: k.byrne@ucc.ie

Carly Green

Forest Ecosystem Research Group
University College Dublin
Phone: +353 1 716-7673, Fax: +353 1 716-1102
e-mail: carly.green@ucd.ie

IEA Bioenergy Task 38 brings together the work of national programs in 13 participating countries on Greenhouse Gas (GHG) Balances for a wide range of biomass systems, bioenergy technologies and terrestrial carbon sequestration. As one example of work, case studies have been conducted by applying the standard methodology developed by the Task 38. In the case studies GHG balances of different bioenergy and carbon sequestration projects in the participating countries have been assessed and compared, of which that of New Zealand is one example.

Kimberly Robertson

New Zealand Force Consulting
444 Pukehangi Rd., Rotorua, NEW ZEALAND
Phone: +64 7 343-9559 • Fax: +64 7 343-9557
e-mail: kimberlyrobertson@xtra.co.nz



THE NETHERLANDS

Kees Kwant

NOVEM
Catharijnesingel 59, Postbus 8242, 3503 RE Utrecht
The Netherlands
Phone: +31 30 2393-587 • Fax: +31 30 2316-491
e-mail: a.de.zeeuw@novem.nl

Andre Faaij

Utrecht University, Copernicus Institute
Heidelberglaan 14, 3584 CH Utrecht, The Netherlands
Phone: +31 30 2537-643 • Fax: +31 30 2537-601
e-mail: a.p.c.faij@chem.uu.nl



NEW ZEALAND

Kimberly Robertson

Force Consulting
444 Pukehangi Rd., Rotorua
New Zealand
Phone: +64 7 343-9559 • Fax: +64 7 343-9557
e-mail: kimberlyrobertson@xtra.co.nz



NORWAY

Birger Solberg

Agricultural Univ. of Norway, Dep. of Forest Sciences
P. O. Box 5044, N-1432 Ås, Norway
Phone: +47 64 94 88 80 • Fax: +47 64 94 88 90
e-mail: birger.solberg@isf.nlh.no



SWEDEN

Leif Gustavsson

Mid Sweden University
SE-831 25 Östersund, Sweden
Phone: +46 63 165-979 • Fax: +46 63 165-450
e-mail: leif.gustavsson@mh.se



UNITED KINGDOM

Robert Matthews

Forestry Commission. Research Agency,
Mensuration Branch
Alice Holt Lodge, Wrecclesham, Farnham, Surrey
GU10 4LH United Kingdom
Phone: +44 1420 526-235 • Fax: +44 1420 234-50
e-mail: r.matthews@forestry.gov.uk



UNITED STATES

Matthew Ringer

National Renewable Energy Laboratory
1617 Cole Blvd. MS-1613, Golden, Colorado, U.S.A.
Phone: +1 303 384-7747 • Fax: +1 303 384-6363
e-mail: matthew_ringer@nrel.gov